




Diamond Series, IP66 IR Bullet

CP-2042T


IR Bullet, IP Camera, Waterproof, IP66, Vari- focal Lens

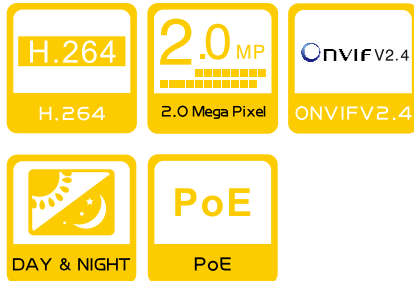

Key Features

- H.264 HP/MP/BP, M-JPEG, JPEG Compression
- Manual VF 2.8-12mm Lens, F1.2
- 42 Leds , up to 30 meters IR range
- Support True D/N, 3D-DNR, DWDR and Region of Interest
- ONVIF2.4, CGI and SDK
- Audio in/out, CVBS
- IP66 waterproof
- POE: IEEE 802.3af


ROI

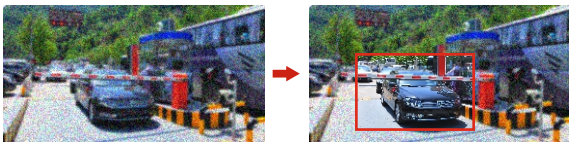

ISS Mobile



Dimensions

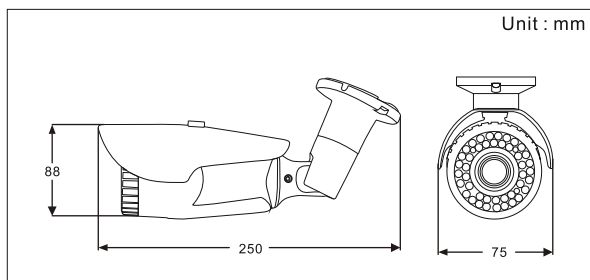

Model NO.	CP-2042T
CAMERA	
Sensor/DSP	1/2.8" Progressive Scan CMOS
Day/Night	ICR
Min. Illumination	0.01lux @F1.2, AGC on, 0 lux with IR on
Lens	2.8-12mm VF Lens
IR LED	42 LEDs
IR Distance	5~30m
Electronic Shutter	1/20~1/30000s
VIDEO/AUDIO	
Compression	H.264/M-JPEG
Max. image Resolution	1920 x 1080
Frame Rate	30fps @ 1080P
Bit Rate	Main Stream: 1000~12000kps Sub Stream: 512~2048kpbs
Compression	G.711
Talkback	YES
NETWORK	
Protocol	TCP/IP, UDP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, FTP, UPNP, NTP
Compliance	ONVIF V2.4(1.02 backward compatible), CGI
PC Client and Browser	ISS, IE6.0 and above, Google Chrome, Mozilla Firefox, Mac Safari
Mobile phone	iPhone, iPad, Android
INTERFACE	
Video Output	1Vp-p composite output (75Ω /BNC)
Audio Input	1 CH 3.5mm audio interface, MIC IN/LINE IN
Audio Output	1 CH 3.5mm audio interface
LAN	1 RJ45 10M / 100M ethernet port
GENERAL	
Working Temperature	-10°C~ +50°C without heater
Working Humidity	0% - 90%
Power Supply	12 VDC ± 10% ,PoE(802.3af)
Dimensions	250*75*88mm
Weight	735g
Available Models	
QH-NW452DS-PT	
T:Heater	-40°C~ +50°C