



# 16 CH 720P AHD DVR

AHD DVR

## CP-D7116AM

16 CH 720P AHD DVR , HDMI & VGA Video Out

**1080P**

1080P

**H.264**

Video Compression

Mobile Phone

CMS

**AHD**


AHD



### Key Features

- All channel 720P@25/30FPS realtime recording
- Compatible with Analog 960H/D1
- Support 10M/100Mbit/s network interface
- Free ISS Management software
- Mobile surveillance supported, including iPhone, iPad, Android
- Support browser IE 6.0 Above;
- Free DDNS server: HDCCTVDDNS
- P2P support
- 1080P HD Display


### P2P

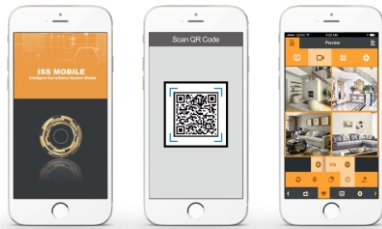


### App



Advance APP for professional user



### Dimensions

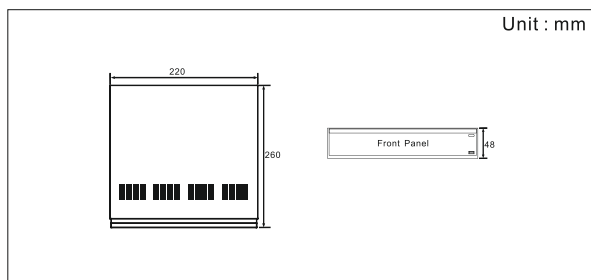

<b>Model NO.</b>	<b>CP-D7116AM</b>
<b>OPERATION SYSTEM</b>	LINUX
<b>VIDEO</b>	
VIDEO SYSTEM	NTSC/PAL Switch Selectable
INPUT	BNC*16, 1.0Vp-p, 75ohm
SPOT	NA
HDMI OUTPUT	1 HDMI Output
VGA OUTPUT	1 VGA Output
LOOP OUT	NA
<b>AUDIO</b>	
INPUT	4CH, RCA
OUTPUT	1CH, RCA
TALK BACK	YES
<b>CONTROL</b>	
MOUSE	2*USB2.0
IR CONTROLLER	YES
<b>STORAGE</b>	
BUILD IN INTERFACE	SATA 3.0 *(2*HDD max 4TB )
<b>DISPLAY</b>	
DIVISION	1, 4, 9, 16
ZOOM	Preview&Playback Zoom Support
<b>RECORDING</b>	
COMPRESSION	H.264(High profile)
RECORDING MODE	Manual/Schedule/Motion Detection/Sensor ( Optional )
RESOLUTION	Mode 1: 16CH 720P
	Mode 2: 8CH 720P + 8CH 960H
	Mode 3: 16CH 960H
RECORD FRAME RATE	PAL: 16CH 720P@25fps, NTSC: 16CH 720P@30fps
QUALITY	Worst, Worse, Bad, Normal, Better, Best
<b>PLAYBACK</b>	
SYNC PLAYBACK	1 to 4(Max 4 CH)
SPEED	Normal, FF(1X, 2X, 4X, 8X.), Slow (1/2X, 1/4X, 1/8X)
SEARCH METHOD	Time, Event, Channels and Calendar
<b>COMMUNICATION</b>	
REMOTE ACCESS	IE ( 6 and above), ISS ( Windows XP/WIN7/WIN8 ), ISS MOBILE2 ( IOS, Android )
REMOTE OPERATION	Remote view, remote playback, remote setup
NETWORK SERVICE	TCP/IP, PPPOE, DDNS, FTP, NTP UPNP
MOBILE DEVICE	Iphone, Ipad, Android
3G EXTERNAL MODULE	Yes, with USB 2.0 Port
WAN RJ45	10/100Mbit/s
WIFI EXTERNAL MODULE	Yes, with USB 2.0 Port
GUI INTERFACE	Supported GUI 16 Bit True Color
PTZ PROTOCOL	PELCO-D, PELCO-P, etc 17 kinds of protocol
<b>BACKUP</b>	
INTERNAL	NA
EXTERNAL	2*USB2.0
NETWORK	YES
FILE FORMAT	AVI/dav
<b>GENERAL</b>	
ALARM IN/OUT	4/1
RS-485	1
UNIT DIMENSION(mm)	325(L) x 53(H) x 245(W)
OPERATION TEMPERATURE	10° ~ 40°
WORKING HUMIDITY	10% ~ 90%
POWER CONSUMPTION	DC 12V,2A, <13W (Exclude HDD)
Weight	1.543Kg
Net weight	2.269Kg